



Offering a wide variety of products, BOSS® PRO meets the needs of the most demanding applications. BOSS® PRO technology and quality ensure these products will perform to the highest level.

350 RING RD. ELIZABETHTOWN, KY | 270.769.3385
WWW.BOSSPRODUCTS.COM



A PRODUCT OF
SOUDAL



ADHESIVES

SEALANTS

FOAMS



NOTES

POOL, SPA, & HARDSCAPES

BOSS 231 Clear Sealant/Adhesive


A plasto-elastic, paintable, one component repair sealant based on copolymers with excellent adhesion on bitumen, asphalt, hardened concrete, metal, glass, brick, wood, and plastics including Kynar 500®. Suited for wet, non-absorbing surfaces, and is ideally suited for waterproofing cracks in roofs, gutters, skylights, chimneys, walls, etc. Resistant to UV exposure and temperatures up to 200°F.



- Exceptional elongation & flexibility
- Remains flexible
- UV resistant
- Paintable*
- Excellent adhesion to many building surfaces, even when damp
- Asphalt shingle compatible
- Easily applied, non-stringing formula
- Tools & cleans up easily

Temperature Range: -4°F to 200°F

Cartridge 10.1 oz. | 146432 CLEAR

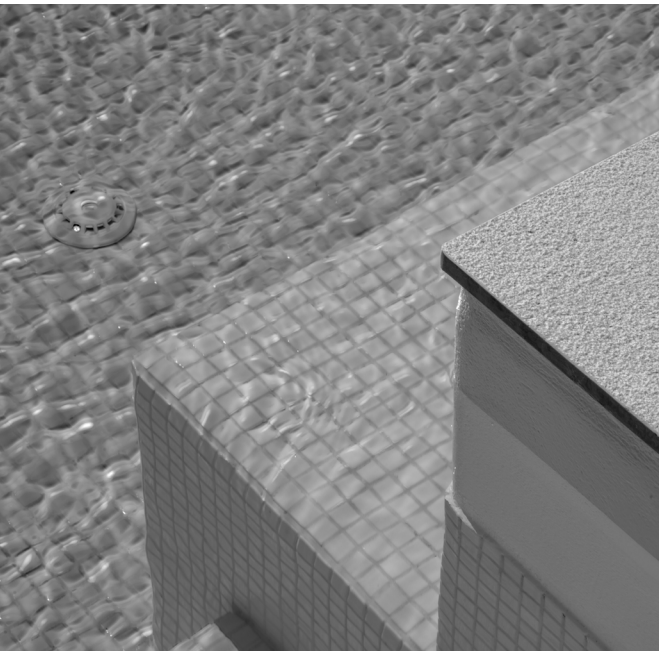

BOSS 323 Hi-Temp Blue Gasket Maker

Cures to a tough rubbery solid to create any size gasket in minutes. Use on cover plates, hose connections, valve covers to provide a waterproof seal.

- Intermittent use to 550°F
- Excellent resistance to weather, temperature extremes, & caustic environments

Temperature Range: -85°F to 400°F
Specs: TT-S-00230C; TT-S-001543A; ASTM C-920; FDA 21-CFR 177.2600; UL Recognized

Pressurized Aerosol Can 8 oz. | 142200



BOSS 315 Industrial RTV 100% Silicone

A paste like, one component acetoxy silicone adhesive/sealant that cures to a tough, rubbery solid when exposed to moisture in the air.


- Will not shrink, sag, slump, or run off
- Excellent in overhead & vertical joints
- Adheres to clean metal, glass, most types of wood, rubber, fabric, & ceramics
- Excellent resistance to weather, temperature extremes, & caustic environments

Temperature Range: -40°F to 400°F
Specs: TT-S-00230C; TT-S-001543A; ASTM C-920; FDA 21-CFR 177.2600; NSF 51; UL Recognized



| Cartridge 10.1 oz. | | Pail 4.5 gal. | | Pressurized Aerosol 8 oz. | |
|--------------------|--------|---------------|--------|---------------------------|--------|
| Clear | 137616 | Clear | 142185 | Clear | 142201 |
| White | 142173 | | | | |
| Black | 142171 | | | | |
| Aluminum | 142170 | | | | |

| Tube 3 oz. | | Blistercard 3 oz. | |
|------------|--------|-------------------|--------|
| Clear | 142162 | Clear | 142161 |
| White | 142166 | White | 142165 |
| Black | 142160 | | |

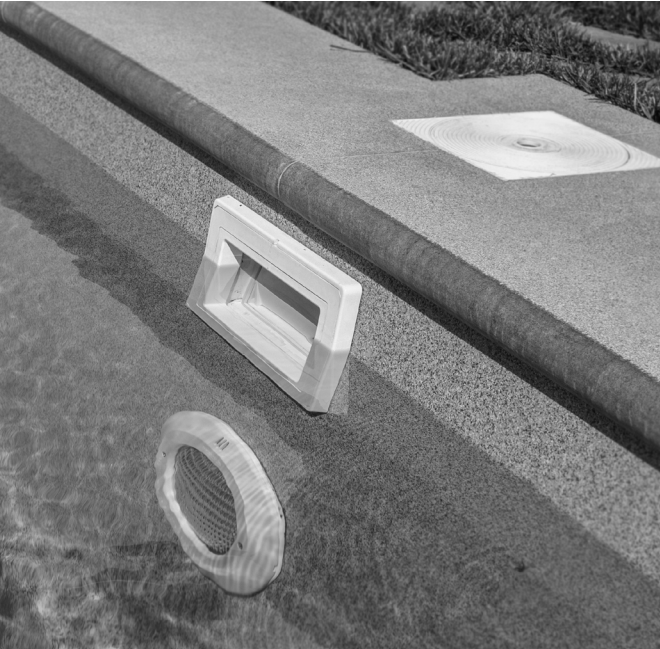

ACCESSORIES & GUNS

BOSS 335 Gun Foam Cleaner

Specially developed to clean the PU foam applicator guns. A correct cleaning of the gun and the proper use of the product will ensure an optimal function and prevent blockage of the applicator gun. Also suited for the cleaning of the valve and spray nozzle of PU foam canisters and removing uncured PU foam.

Aerosol Can 12 oz. | 142905



BOSS 635C Spray Adhesive

This spray combines a uniform misting spray pattern with super high solids to create a fast tacking and high bond strength.

- VOC compliant
- Non-chlorinated
- Great for adhering insulation board to ductwork
- Adheres well for placement of signs and instructions to your work

Aerosol Can 12 oz. | 144668



BOSS 891 Hand Cleaner with Lanolin

Specially formulated to quickly and easily remove oil, grease, grime and stains without damaging the skin.

- Removes paints, grease, oil, dirt, adhesives & sealants
- Not harmful to skin, contains lanolin
- 12 bottles / case

Inverted Bottle 14 oz. | 142479



BOSS 893 Dual Sided Hand Wipes

Specially formulated hand wipes designed to quickly and easily remove oil, grease, grime and stains without damaging the skin.

- Pre-moistened
- Removes marker, ink, paints, grease, oil, dirt, adhesives, & sealants
- Not harmful to skin
- Ideal for most hard surfaces including: painted walls, tools, work surfaces, signs, siding, & bathroom partitions
- Not harmful to skin, contains lanolin
- 12 bottles per case

80 ct .Tubs | 142865




Caulk Gun 144149
Quart Caulk Gun 144381



Foam Gun - Threaded Metal Tip | 144150



Foam Gun - Plastic Tip 22" | 122129

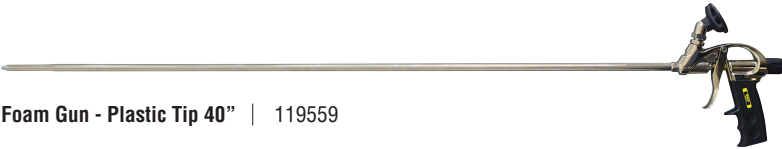

Foam Gun - Plastic Tip 40" | 119559

BOSS 333 Gap Filling Foam

A ready to use, multi-purpose, polyurethane foam that expands to three times its original volume upon contact with air.

- Use for insulating around pipes, cable, blank openings, gaps & cracks
- Weatherproof against wind & moisture
- Can be cut, sanded, & painted

Service Temperature: -40°F to 200°F
Application Temperature: 40°F to 115°F
R-Value: 4 to 5 per inch
Specs: ASTM E-84, UL 723: Flame Spread-15, \\\nSmoke Developed-35

| | |
|-------------------------------|--------|
| Aerosol Genius Gun Can 20 oz. | 143104 |
| Aerosol Straw Can 12 oz. | 142212 |



FOAMS

PATENTED
GENIUS GUN

The Genius Gun is a patented hand-held system for applying BOSS PRO's Genius PU Foam range. The unique trigger mechanism provides maximum control of dosage, with a comfortable hand grip specifically designed for single-handed use. Genius Gun's re-sealable applicator straw means the product can be used again and again for up to 6 weeks.

COMFORTABLE
EASY TO USE
REUSABLE




BOSS 801 Pool & Spa Adhesive

A one part, low odor, neutral resistant, non-corrosive silicone adhesive/sealant. It is designed to adhere ceramic tile to many substrates such as acrylic, fiberglass, ABS, PVC, wood, and masonry. It also provides an excellent seal for spa jets & fittings. Ideal for bathroom tile installations.

- Waterproof/weatherproof seal
- Mildew resistant
- Non-sag formula
- Adheres ceramic tile, spa jets, skimmers
- VOC Compliant in all 50 states

| Cartridge 9.5 oz. | Pressurized Aerosol 8 oz. |
|-------------------|---------------------------|
| Clear 142312 | Clear 142943 |
| White 142314 | |
| Grey 142313 | |

Custom colors available upon request

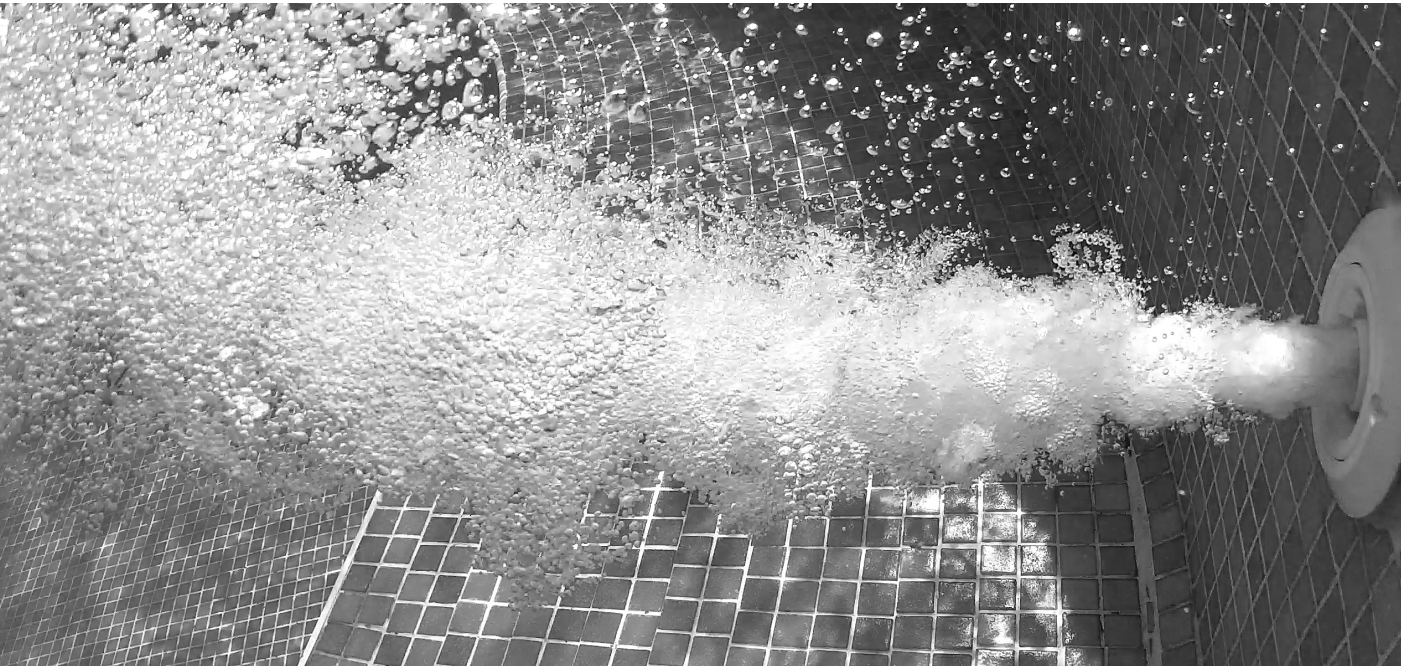

BOSS 804 Pool & Spa Ceramic Tile Grout

A premium quality silicone sealant specially formulated for grouting ceramic tile. A one-part, neutral cure, mildew resistant silicone sealant that has very little odor.

- Waterproof/weatherproof
- Mildew resistant
- Non-sag formula
- Good adhesion to ceramic tile, porcelain tile, natural stone, polycarbonate & lighting covers
- VOC Compliant in all 50 states

| Cartridge 9.5 oz. | | | | |
|-------------------|-------------|------------|--|--|
| White 142311 | Grey 142309 | Tan 142310 | | |

Custom colors available upon request



BOSS 802 Pool & Spa General Purpose Adhesive

A one part, mildew resistant, acetoxycure silicone sealant. Designed for sealing spa jets, skimmers and fittings. Can be used for most repair and maintenance applications.

- Low viscosity & slow skin time to allow for smoother tooling & finished seal
- Sealing spa jets, skimmers, & fittings
- Mildew resistant
- Waterproof/weatherproof seal
- Non-sag formula
- VOC compliant in all 50 states

| Cartridge 9.5 oz. | | | |
|-------------------|--------------|--|--|
| Clear 142315 | White 142316 | | |

Custom colors & other sizes available upon request



BOSS 820 Silicone Pool & Spa Lube

A premier product for lubrication in the Pool and Spa Industry designed for use as a water repellent, sealing compound. Its grease-like consistency, high tack, chemical inactivity and superior dielectric properties make it an excellent choice for use in water applications. An excellent release agent and lubricant for rubber and plastic parts such as O-rings, valves or plastic gears.

- Waterproof & chemical resistant
- Prevents corrosion, rust, & damage
- Ideal for valves, other plastic, & rubber applications requiring silicone
- Formulated for use in harsh conditions
- Provides excellent lubrication & protects from water washout



Plastic Tube 5.3 oz. | 142325 CLEAR

POOL & SPA

BOSS 822

EXPANSION JOINT SEALANT




An expansion joint sealant is a free flowing, self-leveling, one component material. Its flowable characteristics allow it to fill in joints and cracks to make a smooth and permanent seal. Supplied ready-to-use, this material cures at room temperature to a tough, rubbery solid. It adheres well to most common construction substrates including concrete, wood, vinyl, glass and various plastics. It resists weathering, moisture, vibration, ozone, thermal expansion and temperature extremes.

- One component
- No mixing
- Free flowing
- 50% movement
- Good adhesion to a wide variety of substrates
- VOC compliant
- Self-leveling
- 20-30 minute tack free time

Specs: Meets ASTM C-920, Type S, Grade P, Class 25, Use NT; TT-S-00-230C Type 1 Class A; CGSB 19.13 Class 1 Class 25

Cartridge 28 oz.

| | | | | | |
|-------|--------|-----|--------|------|--------|
| White | 142931 | Tan | 142929 | Grey | 142930 |
|-------|--------|-----|--------|------|--------|

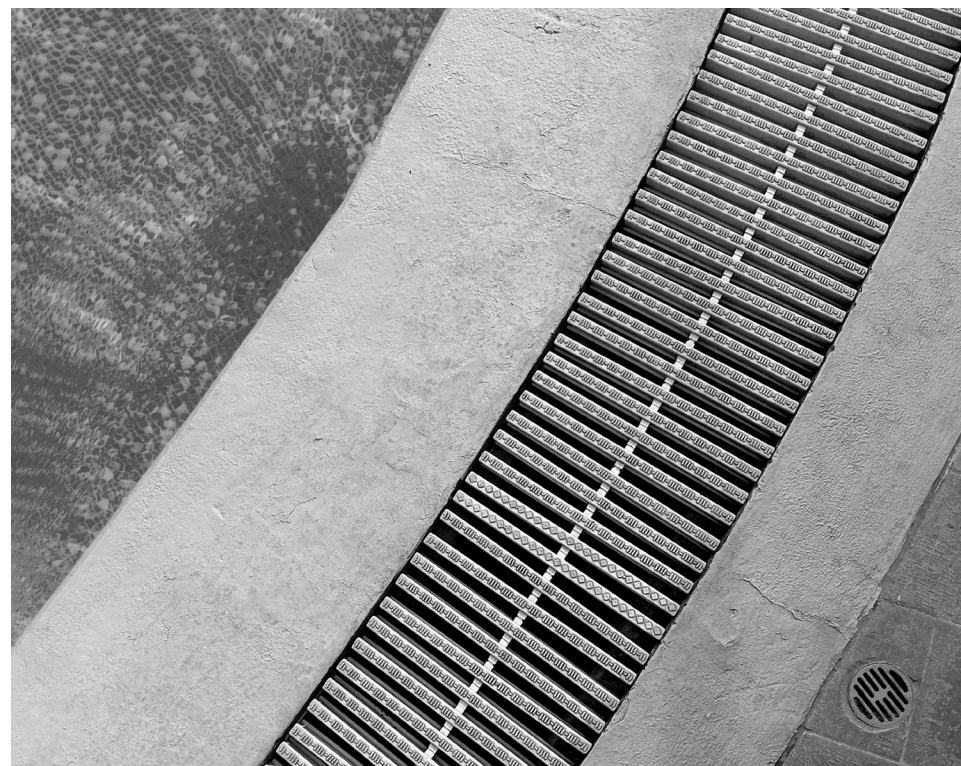

BOSS 125 Multi-Seal®



A multi-purpose, one part sealant, formulated with USP™ Technology to form a highly durable, flexible seal. This unique sealant offers outstanding primerless adhesion to most common building materials including vinyl, aluminum, steel, concrete, wood, glass and asphalt shingles.

- All weather plastic cartridge
- Applies the same in all seasons
- Bonds to wet/damp surfaces
- VOC compliant
- Paintable in under an hour*

Temperature Range: -40°F to 200°F

Specs: TT-S-000230C, Type II, Class A, ASTM C920, Type S, Grade NS, Class 25 Use NT-non traffic, G-glass, M-mortar, A-aluminum, and O-other, CAN/CGSB 19.13-M87

Cartridge 9.5 oz.

| | | | | | |
|---------------|--------|---------------|--------|----------------|--------|
| White | 142900 | Hunter Green | 142891 | Special Bronze | 142896 |
| Black | 142888 | Medium Bronze | 142893 | Brown | 142889 |
| Grey | 142890 | Redwood Tan | 142895 | Arctic White | 158853 |
| Limestone | 142892 | Tan | 142898 | Translucent | 142889 |
| Aluminum Grey | 142887 | Stone | 142897 | | |

Also available in Sausages, Pails, & Drums



BOSS 535 Multi-Purpose Polyurethane Sealant

A high quality, elastic, one component, professional grade sealant based on polyurethane. It is easy to apply and offers good weather and UV resistance. It remains elastic after curing and does not bubble in high temperatures or humidity. It is perfect for high movement or expansion joints.



- Very good adhesion to most substrates
- Qualifies for LEED credits
- Good UV Resistance & color stability
- Long life reliability
- Interior & exterior uses
- Paintable with most paint systems
- Non-yellowing & non-staining

Service Range: -22°F to 194°F

Cartridge 10.1 oz.

| | | | | | |
|-------|--------|----------------|--------|-------------|--------|
| White | 144575 | Limestone | 144580 | Redwood Tan | 147028 |
| Black | 144557 | Medium Bronze | 144597 | Tan | 147163 |
| Grey | 144691 | Special Bronze | 147027 | | |



BOSS 185 Multi-Seal®

A one component, high performance adhesive/sealant formulated with USP™ technology. Provides excellent durability, maximum adhesive strength and is VOC compliant in 50 states. It is color stable and UV resistant (non-yellowing) and contains no isocyanates solvents halogens or acids. It is a moisture curing sealant that remains flexible, even at low temperatures with quick grab strength and excellent adhesion to various substrates such as aluminum, steel, glass, wood, brick concrete, mirrors and many plastics. It is also paintable with most latex paints.



- Fast cure
- Quick grab
- Formulated with USP™ Technology
- VOC Compliant
- UV resistant & color stability
- Paintable with most latex paints
- Can be applied on wet surfaces

Temperature Range: -40°F to 200°F

Cartridge 10.1 oz. | 143121

